


2 Positions/2 Ports, 2 Positions/3 Ports Solenoid Valve

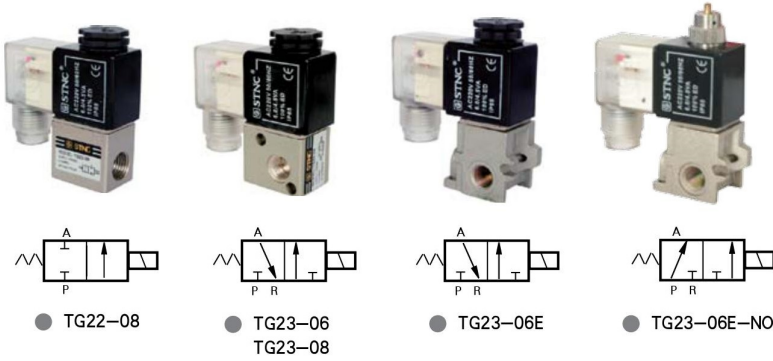


● Ordering Code

TG	22	08	AC220V
Series	Function	Pipe Size	Standard Voltage
	22 : 2 Positions/2 Ports	06 : G1/8	DC24V
	23 : 2 Positions/3 Ports	08 : G1/4	AC110V
			AC220V

■ Technical Parameter

Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Medium Temperature
TG22-08	2 Positions/ 3Ports	G1/4	2.5	Air	0 ~ 0.8MPa	Internally Piloted	5 Cycles/Sec	Needless	-5 ~ 60°C
TG23-06		G1/8	1.2						
TG23-08		G1/4	1.2						
TG23-06E		G1/8	1.2						
TG23-06E-NO		G1/8	1.2						




■ Figure Dimension

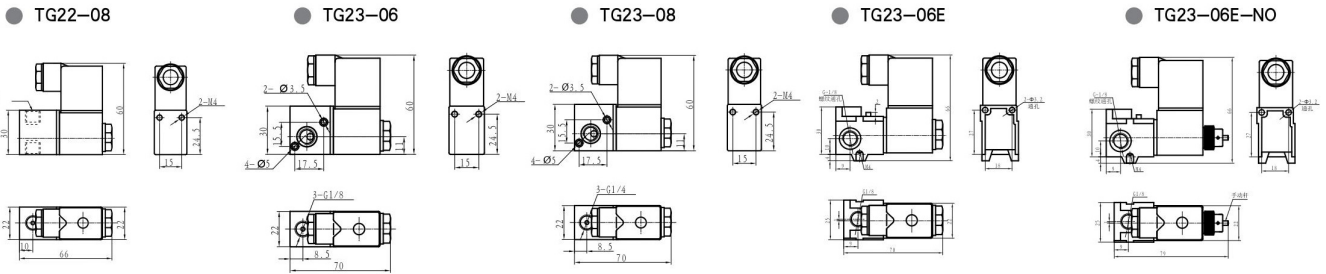

● Ordering Code

TG2311D	10F
Series	Mainfold no.

TG2311D-10F Weaving Combined Valve

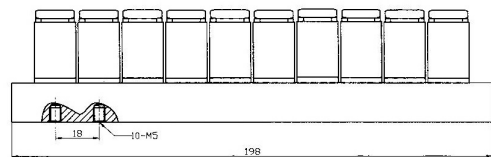

Item	Model	Structure	Prot Size	Port Size (mm)	Medium	Working Pressure	Action	Frequency	Lubrication	Temperature	Voltage
TG2311D-10F		2 way 3 Position	M5	0.8	Air	0 ~ 0.6 MPa	Directact	5 Cycles/sec	No Oil	-5°C ~ 50°C	DC24V