

手 转 阀 Hand-switching Valve



HV400



HV-02



K34R8-L6



K34R8-L8

订购码 Ordering Code

HV	-	02	B		K	34	-	R₈	L8	D
规格代码 手转阀 Specification Code Hand-switching Valve		接口口径 Joint Pipe Bore 02: G1/4" 03: G3/8" 04: G1/2"	接管形式 空白: 管接式 B: 板接式 Joint Pipe Type Blank: Pipe Connection Type B: Plate Connection Type		规格代码 手转阀 Specification Code Hand-switching Valve	位通数 24: 二位四通 34: 三位四通 Position and Way NO. 24: Two-position Four-way 34: Three-position Four-way		形式代号 R ₈ : 手转阀 Type Code R ₈ : Hand-switching Valve	接口口径 Joint Pipe Bore L6: G1/8" L8: G1/4"	底部接口 Base Joint



规格 Specification

型号 Model	HV-02	HV-03	HV-04	K34R ₈ -L6	K34R ₈ -L8
工作介质 Working Medium	经40微米过滤的空气 / 40 Micron Filtered Air				
有效截面积 Effective Sectional Area	30mm ² (CV=1.68)			18mm ² (CV=1.00)	
接口口径 Joint Pipe Bore	G1/4"	G3/8"	G1/2"	G1/8"	G1/4"
使用压力范围 Working-pressure Range	0~0.8MPa				
使用温度范围 Operating Temperature	0~60℃				

- * 公司可提供密封结构形式为橡胶软密封和陶瓷硬密封的手转阀。
- * Company can offer Hand-switching Valve with soft rubber seals and hard pottery seals as the seal structure form.

外形尺寸 Overall Dimension

HV

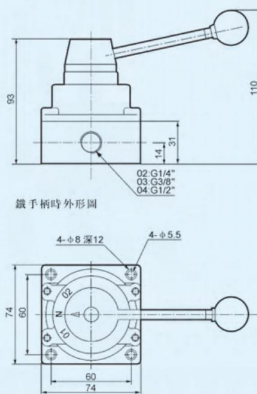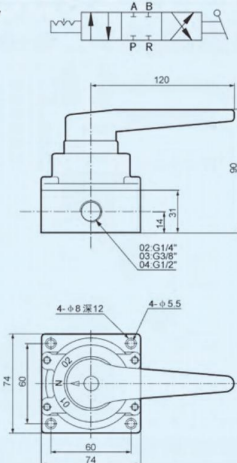

K34R₈-L8

